


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 32 TOWNSHIP 15 RANGE 5
DATE: 5-16-2000 6-28-05
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 8-18-94

IN. S.P.C. E ZONE, NAD 83
NAME: 15053208
N: 493860.9270(m)
E: 71514.5730(m)

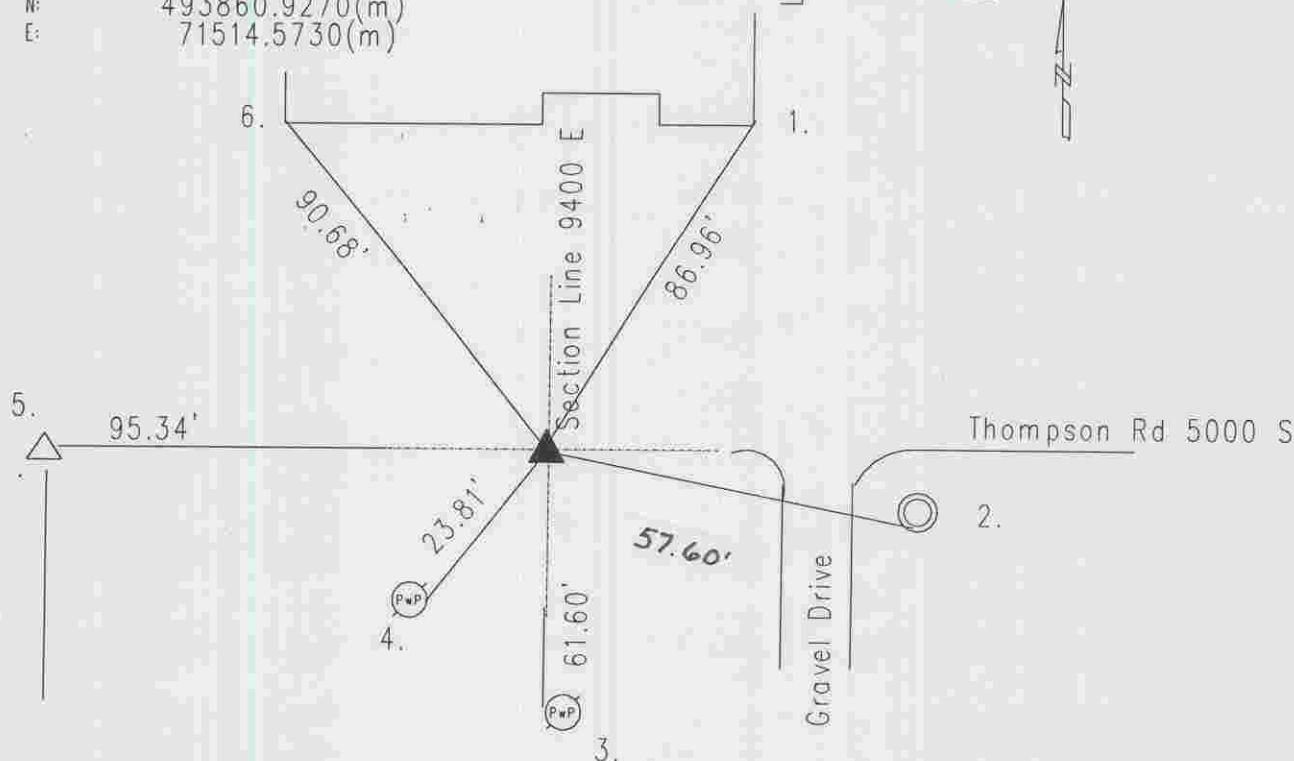

Original post set 1820 by Hendricks with witnesses: 28" oak N 75 W 16 links, 17" ash N 37 E 16 links per Marion County Atlas pg. 14. No record of monument or witnesses is available. Schulz 6-12-62 called iron pin over stone. McLand 2-3-69 called the same. McLand '70 called a PK nail. Fortner 2-19-75 called the same. Excavated by Wilcoxen 8-18-94 railroad spike found at surface. Stone with guard stake found 14" down. Harrison set. Re-tied 5-16-2000 by Wilcoxen.

HC553208

REF.	DISTANCE	DESCRIPTION
1.	86.96'	SW corner of garage at foundation ADDRESS 9420
2.	57.60'	Cut 'x' S-rim of telephone manhole
3.	61.60'	Due S to small PK nail W PwP#36-711BB 6"up
4.	23.81'	Small PK nail SE PwP#88-711BB
5.	95.34'	Due W to capped rebar : N Q 5-14-5
6.	90.68'	SW corner of foundation for ADDRESS 9420